

Mounting Brackets

Mercury Products offers several different series of mounting brackets and straps in a complete range of diameters and designs.



Applications

For heavy truck, bus, RV, agricultural and construction equipment, exhaust and filtration:

- After-treatment systems
- Air / oil cleaners
- Oil coolers
- Muffler shields and others

Materials

Hot-rolled or cold-rolled 1008/1010 steel, stainless steel, aluminized stainless or other upon your request.

Sizes

Standard diameters range from 5" to 24" or custom, per your application requirements.

Assemblies

Weldments, with or without hardware.

Finishes

Zinc-plated, chrome-plated, high-heat paint, polished stainless or other upon your request.



About Mercury Products Manufacturers around the world count on us for custom and innovative metal products and assemblies, and have since 1946. Mercury has the resources, flexibility and expertise to handle even the most demanding projects. Our customers have a strategic partner for every step of the process, from engineering and design through testing and manufacturing, because we align our capabilities with their goals. With our products ultimately used for securing and serving the heavy truck, construction, agricultural, automotive and motorcycle market vehicles in addition to industrial, exhaust and other market products, we like to think we help hold the world together!


MERCURY PRODUCTS™
ENGINEERED FABRICATIONS & ASSEMBLIES

1201 South Mercury Drive
Schaumburg, Illinois 60193-3598
info@mercprod.com

Certifications:
ISO9001 | ISO/TS16949 | ISO14001
See our website for more information.

Mounting Bracket Specifications

Mounting Bracket

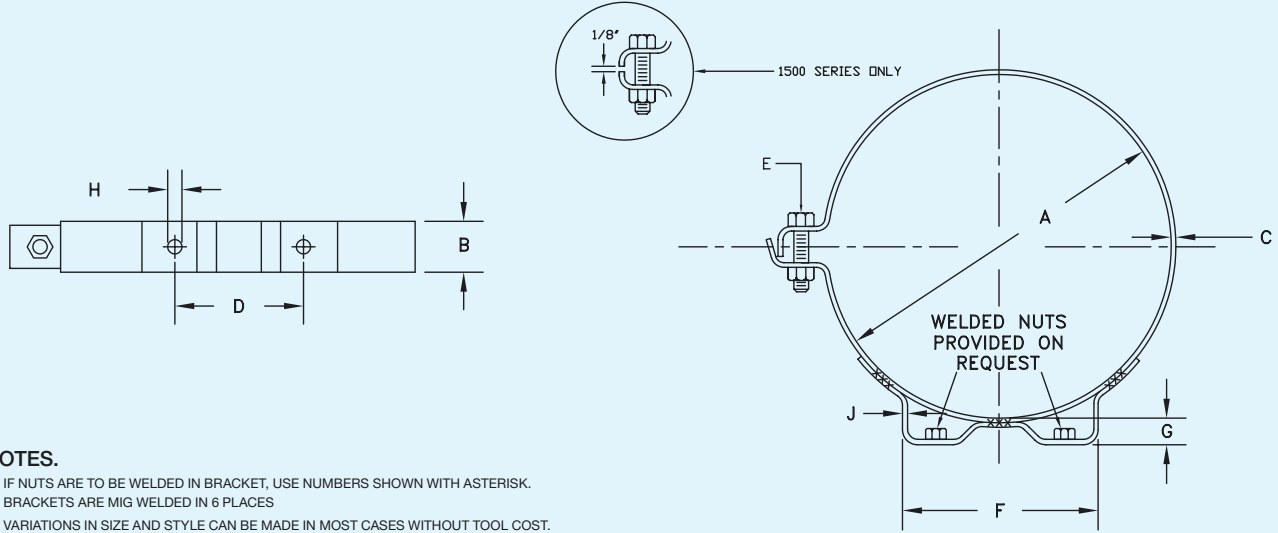

NOTES.

- * IF NUTS ARE TO BE WELDED IN BRACKET, USE NUMBERS SHOWN WITH ASTERISK.
- ** BRACKETS ARE MIG WELDED IN 6 PLACES
- VARIATIONS IN SIZE AND STYLE CAN BE MADE IN MOST CASES WITHOUT TOOL COST.
- CUSTOM SIZES AND FINISHED AVAILABLE UPON REQUEST

Series	A	B	C	D			E	F	G	H	J	Weld Nut	
				Min	Std	Max						Series	Size
1500	5" & 10"	7/8"	0.074	2 3/4"	4"	4 1/4"	1/4"-20 x 1 1/2" Stove Bolt	5 1/4"	1/2"	11/32"	0.074	1500N*	5/16"
3000	8" & 12"	1 1/4"	0.090	3 1/4"	5"	5 1/4"	5/16"-18 x 1 1/2" Hex Head	6 1/4"	7/8"	13/32"	0.090	3000N*	3/8"
3300	10" & 14"	1 1/4"	0.104	3 1/4"	6"	7 1/2"	3/8"-16 x 1 1/2" Hex Head	8 1/2"	7/8"	13/32"	0.104	3300N*	3/8"
3500	12" & 18"	1 1/4"	0.104	4"	8"	10"	3/8"-16 x 1 1/2" Hex Head	11"	7/8"	13/32"	0.104	3500N*	3/8"
5000**	12" & 24"	1 1/2"	0.120	4"	8"	9 3/4"	3/8"-16 x 1 1/2" Hex Head	11"	1 1/16"	15/32"	0.179	5000N*	7/16"